



深圳市格路光电有限公司


Shenzhen GLU Lighting Co., Ltd.

LED Neon Flex










01 4×10mm Sideview Neon Flex

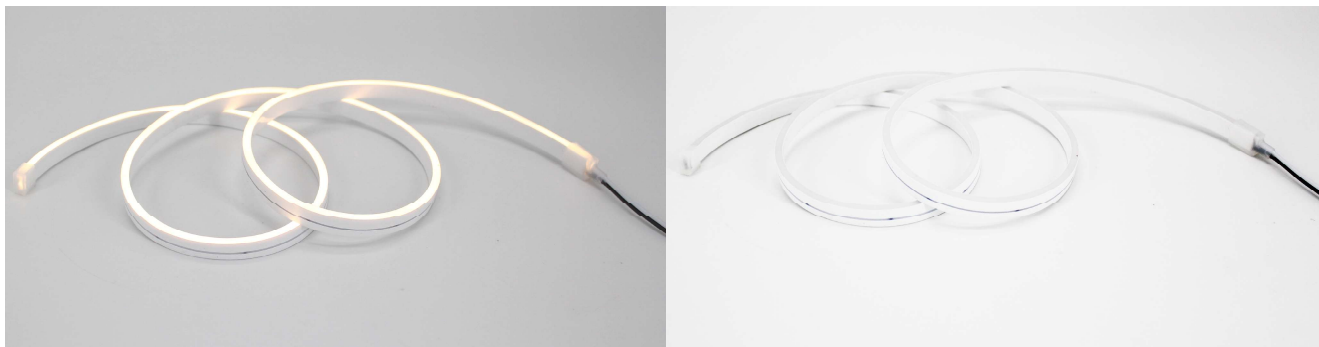


Structure

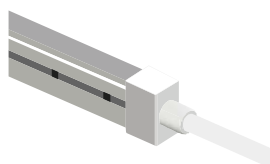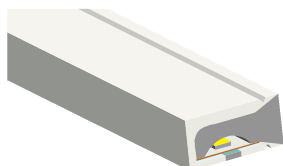


- ① Luminous surface
- ② Cutting line show window
- ③ Thermostable and cold-resistant anti-buckling base board
- ④ FPCB
- ⑤ Clip fixing position
- ⑥ LED
- ⑦ Shading layer

View angle 120°




Light direction: Sideview

Dimension

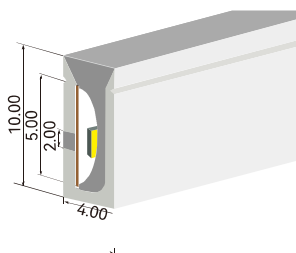

Bendable Direction

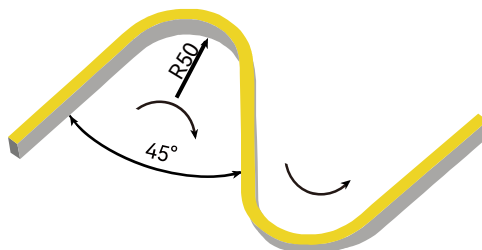

4×10mm Sideview LED Neon Flex

PCB Width(mm)	5mm/6mm
Working Voltage	DC12V/DC24V & Others customized
LED Type	2835 SMD/2216 SMD & Others customized
LED Qty.	144leds/m & Others customized
CRI Available for white color	CRI80/CRI90/CRI95
Power recommended	7.2W/M
Color available	White/Natural white/Warm white/Red/Green/Blue/Amber/others customized

Accessories



Endcap with tail



Endcap without tail




Stainless clip


02 6×12mm Sideview Neon Flex



Structure

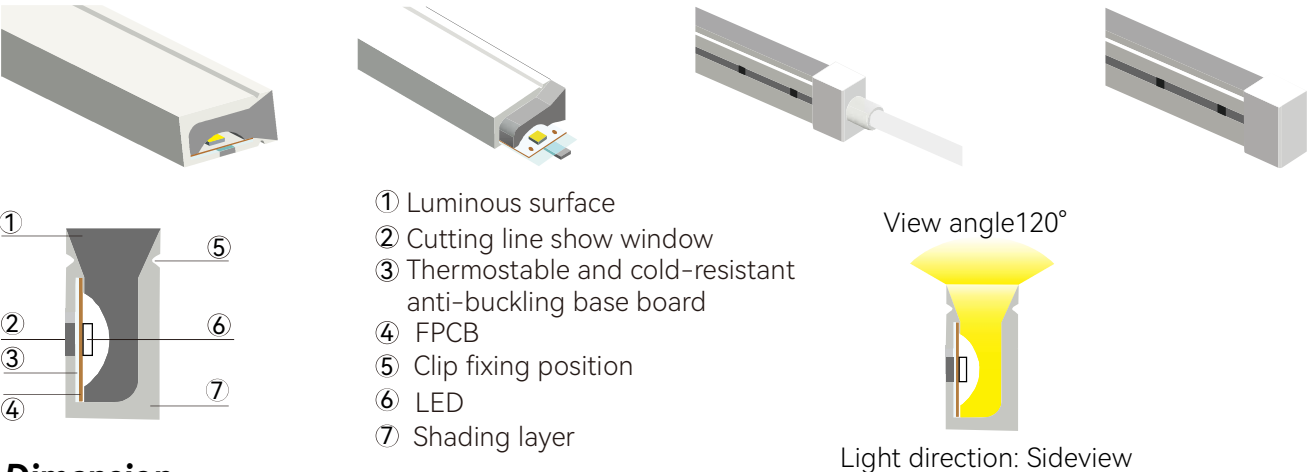


Dimension




6×12mm Sideview LED Neon Flex

PCB Width(mm)	8mm
Working Voltage	DC12V/DC24V & Others customized
LED Type	2835 SMD/2216 SMD & Others customized
LED Qty.	96leds/m or 120leds/m
CRI Available for white color	CRI80/CRI90/CRI95
Power recommended	7.2W/9.6W/M/12W/14W/21W(RGB)
Color available	White/Natural white/Warm white/Red/Green/Blue/Amber/RGB & others customized


Accessories

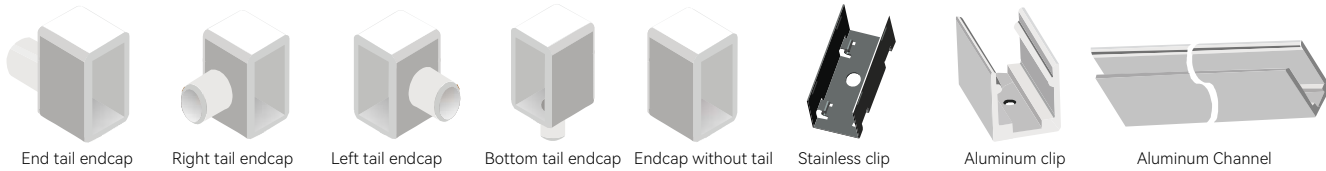


03 6×13mm Sideview Neon Flex

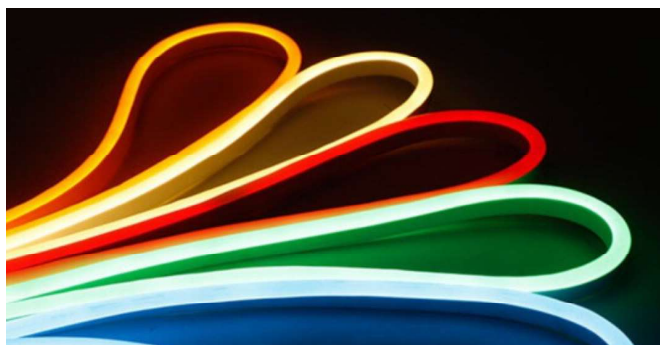


Structure

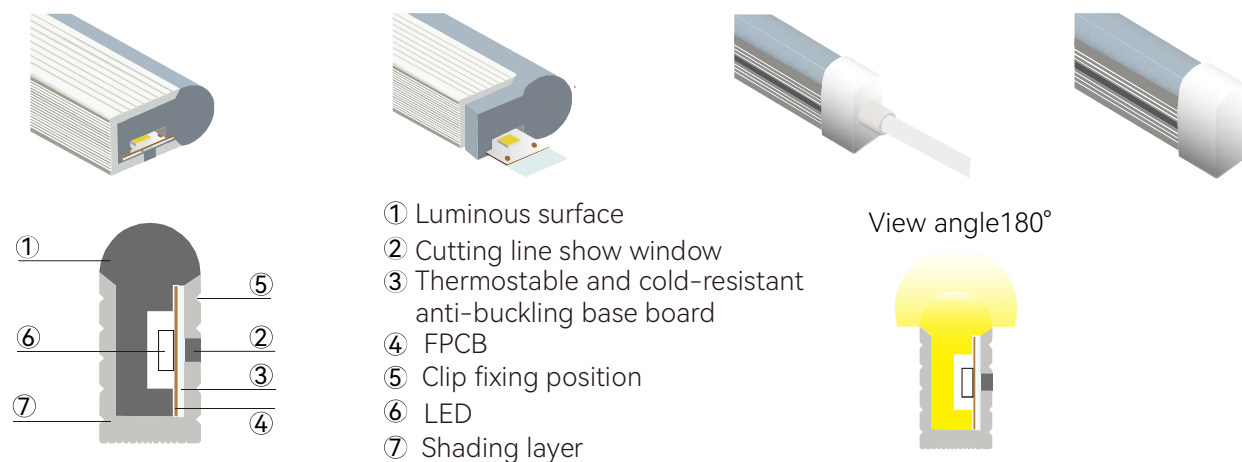

Dimension



Bendable Direction



6×13mm Sideview LED Neon Flex

PCB Width(mm)	8mm
View Angle	DC12V/DC24V & Others customized
LED Type	2835 SMD/2216 SMD & Others customized
LED Qty.	96leds/m or 120leds/m
CRI Available for white color	CRI80/CRI90/CRI95
Power recommended	7.2W/9.6W/M/12W/14W/21W(RGB)
Color available	White/Natural white/Warm white/Red/Green/Blue/Amber/RGB & others customized

Accessories



End tail endcap




Endcap without tail



Stainless clip




Aluminum clip








Aluminum Channel

04 7×14mm Sideview Neon Flex

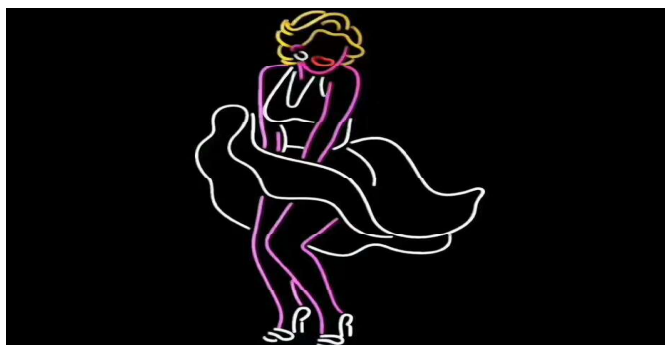

Structure

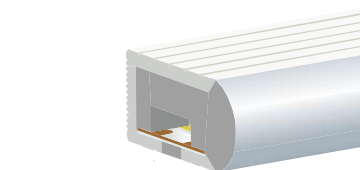


- ① Luminous surface
- ② Cutting line show window
- ③ Thermostable and cold-resistant anti-buckling base board
- ④ FPCB
- ⑤ Clip fixing position
- ⑥ LED
- ⑦ Shading layer

View angle 180°




Light direction: Sideview

Dimension



Bendable direction



7×14mm Sideview LED Neon Flex

PCB Width(mm)	5mm/6mm
View Angle	DC12V/DC24V & Others customized
LED Type	2835 SMD/2216 SMD & Others customized
LED Qty.	120/144leds/m & Others customized
CRI Available for white color	CRI80/CRI90/CRI95
Power recommended	12W/M/14.4W
Color available	White/Natural white/Warm white/Red/Green/Blue/Amber/others customized

Accessories



End tail endcap




Endcap without tail



Stainless clip





Aluminum clip








Aluminum Channel

05 8×16mm Sideview Neon Flex

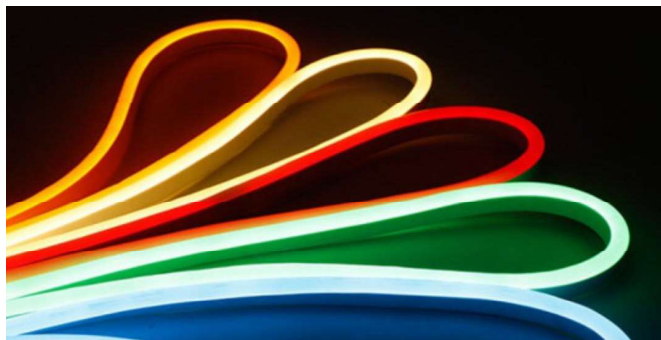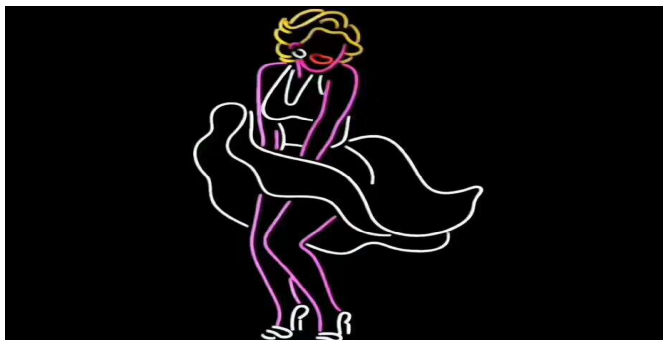


Structure




- ① Luminous surface
- ② Cutting line show window
- ③ Thermostable and cold-resistant anti-buckling base board
- ④ FPCB
- ⑤ Clip fixing position
- ⑥ LED
- ⑦ Shading layer

View angle 180°




Light direction: Sideview

Dimension



Bendable direction



8×16mm Sideview LED Neon Flex

PCB Width(mm)	10mm
View Angle	DC12V/DC24V & Others customized
LED Type	2835 SMD & 5050 SMD & Others customized
LED Qty.	120leds/m(Single color and RGB) or 90leds/m(RGB)
CRI Available for white color	CRI80/CRI90/CRI95
Power recommended	13W/17W/24W(RGB)
Color available	White/Natural white/Warm white/Red/Green/Blue/Amber/RGB & others customized

Accessories



End tail endcap




Endcap without tail



Stainless clip




Aluminum clip








Aluminum Channel

06 10×10mm Topview Neon Flex

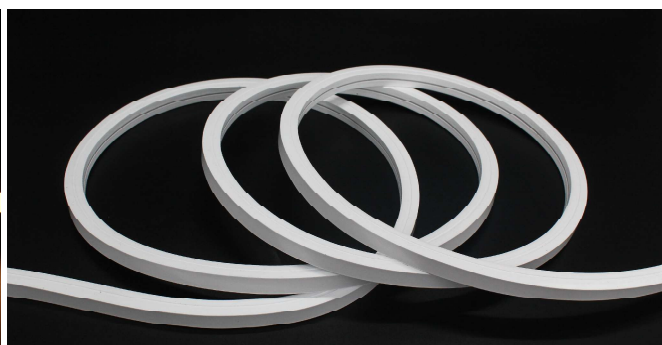


Structure




- ① Luminous surface
- ② Cutting line show window
- ③ Thermostable and cold-resistant anti-buckling base board
- ④ FPCB
- ⑤ Clip fixing position
- ⑥ LED
- ⑦ Shading layer

View angle 120°




Light direction: Topview

Dimension




Bendable Direction




10×10mm Topview LED Neon Flex

PCB Width(mm)	8mm
View Angle	DC12V/DC24V & Others customized
LED Type	2835 SMD & Others customized
LED Qty.	120leds/m(Single color and RGB) or 144leds/m(Single Color)
CRI Available for white color	CRI80/CRI90/CRI95
Power recommended	12W/14.4W/18W(RGB)
Color available	White/Natural white/Warm white/Red/Green/Blue/Amber/RGB & others customized

Accessories




End tail endcap



Side tail endcap




Endcap without tail



Stainless clip




Aluminum clip








Aluminum Channel

07 10×10mm 3 sides Topview Neon Flex

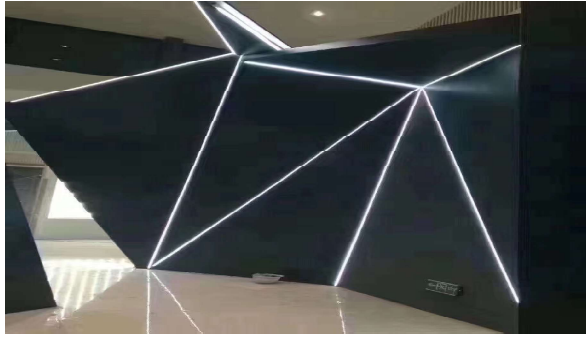


Structure




- ① Luminous surface
- ② Cutting line show window
- ③ Thermostable and cold-resistant anti-buckling base board
- ④ FPCB
- ⑤ Clip fixing position
- ⑥ LED
- ⑦ Shading layer

View angle 150°




Light direction: Topview

Dimension



Bendable Direction



10×10mm 3 sides Topview LED Neon Flex

PCB Width(mm)	8mm
View Angle	DC12V/DC24V & Others customized
LED Type	2835 SMD & Others customized
LED Qty.	120leds/m(Single color and RGB) or 144leds/m(Single Color)
CRI Available for white color	CRI80/CRI90/CRI95
Power recommended	12W/14.4W/18W(RGB)
Color available	White/Natural white/Warm white/Red/Green/Blue/Amber/RGB & others customized


Accessories



End tail endcap



Left tail endcap




Right tail endcap



Right tail endcap




Endcap without tail



Stainless clip





Aluminum clip





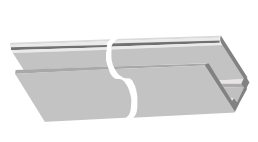


Aluminum Channel

08 12×12mm Topview Neon Flex

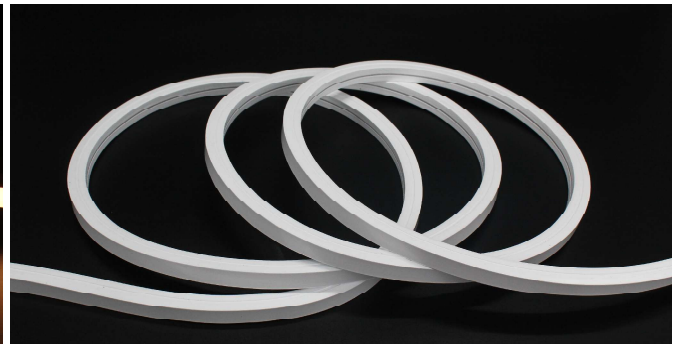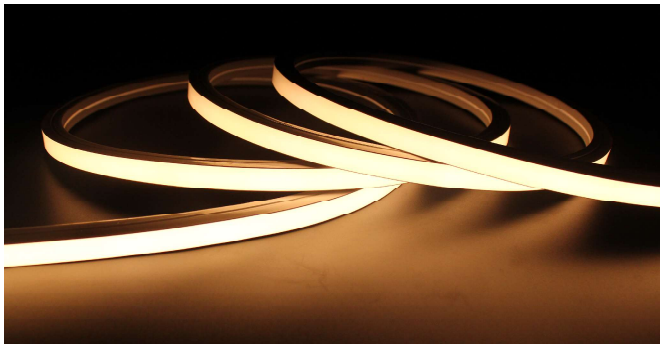


Structure




- ① Luminous surface
- ② Cutting line show window
- ③ Thermostable and cold-resistant anti-buckling base board
- ④ FPCB
- ⑤ Clip fixing position
- ⑥ LED
- ⑦ Shading layer

View angle 120°




Light direction: Topview

Dimension




Bendable Direction




12×12mm Topview LED Neon Flex

PCB Width(mm)	10mm
View Angle	DC12V/DC24V & Others customized
LED Type	2835 SMD & Others customized
LED Qty.	120leds/m(Single color and RGB) or 144leds/m(Single Color)
CRI Available for white color	CRI80/CRI90/CRI95
Power recommended	12W/14.4W/18W(RGB)
Color available	White/Natural white/Warm white/Red/Green/Blue/Amber/RGB & others customized

Accessories




End tail endcap




Left tail endcap




Right tail endcap




Bottom tail endcap




Endcap without tail



Stainless clip

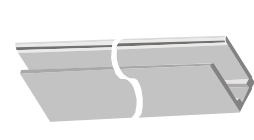

Aluminum clip








Aluminum Channel

09 10×18mm Sideview Neon Flex




Structure




- ① Luminous surface
- ② Cutting line show window
- ③ Thermostable and cold-resistant anti-buckling base board
- ④ FPCB
- ⑤ Clip fixing position
- ⑥ LED
- ⑦ Shading layer

View angle 120°




Light direction: Sideview

Dimension

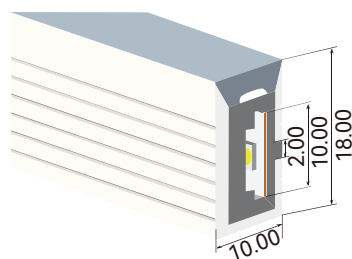

Bendable direction



10×18mm Sideview LED Neon Flex

PCB Width(mm)	10mm
View Angle	DC12V/DC24V & Others customized
LED Type	2835 SMD & 5050 SMD & Others customized
LED Qty.	120leds/m(Single color/HY and RGB) or 168leds/m(HY) or 90leds/m(RGB)
CRI Available for white color	CRI80/CRI90/CRI95
Power recommended	16.5W(Single color)/19.2W(HY)/24W(HY)/19W(RGB)/24W(RGB)
Color available	White/Natural white/Warm white/Red/Green/Blue/Amber/HY/RGB & others customized


Accessories



End tail endcap



Right tail endcap



Left tail endcap



Bottom tail endcap




Endcap without tail



Stainless clip





Aluminum clip





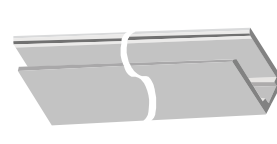


Aluminum Channel

10 10×20mm Sideview Neon Flex

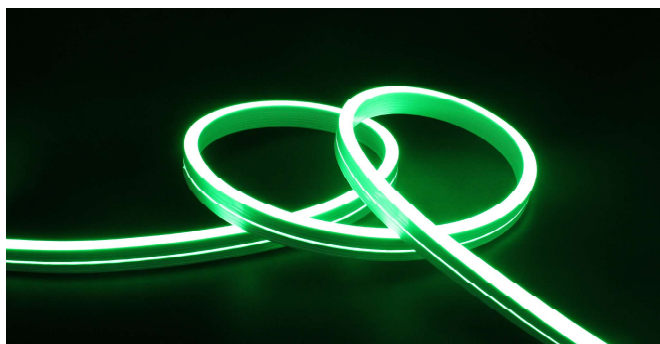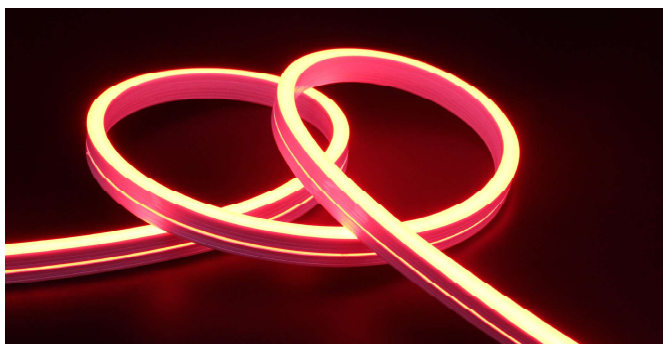


Structure




- ① Luminous surface
- ② Cutting line show window
- ③ Thermostable and cold-resistant anti-buckling base board
- ④ FPCB
- ⑤ Clip fixing position
- ⑥ LED
- ⑦ Shading layer

View angle 120°




Light direction: Sideview

Dimension




Bendable Direction



10×20mm Topview LED Neon Flex

PCB Width(mm)	12mm
View Angle	DC12V/DC24V & Others customized
LED Type	5050 SMD & Others customized
LED Qty.	96leds/m or 120leds/m or 240leds/m or 280leds/m
CRI Available for white color	CRI80/CRI90/CRI95
Power recommended	26W(Single color & RGB)/27.6W(RGBW)/34.5W(RGBW/RGBHY)/38W(HY)
Color available	White/Natural white/Warm white/Red/Green/Blue/Amber/HY/RGB/RGBW/RGBHY


Accessories



End tail endcap



Right tail endcap



Left tail endcap



Bottom tail endcap




Endcap without tail



Stainless clip




Aluminum clip




Aluminum Channel


11 10×22mm Sideview Neon Flex

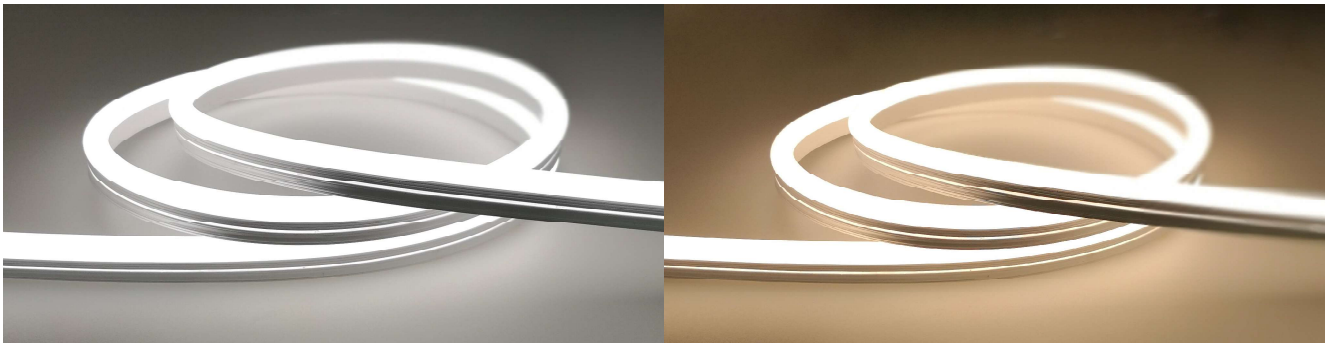


Structure

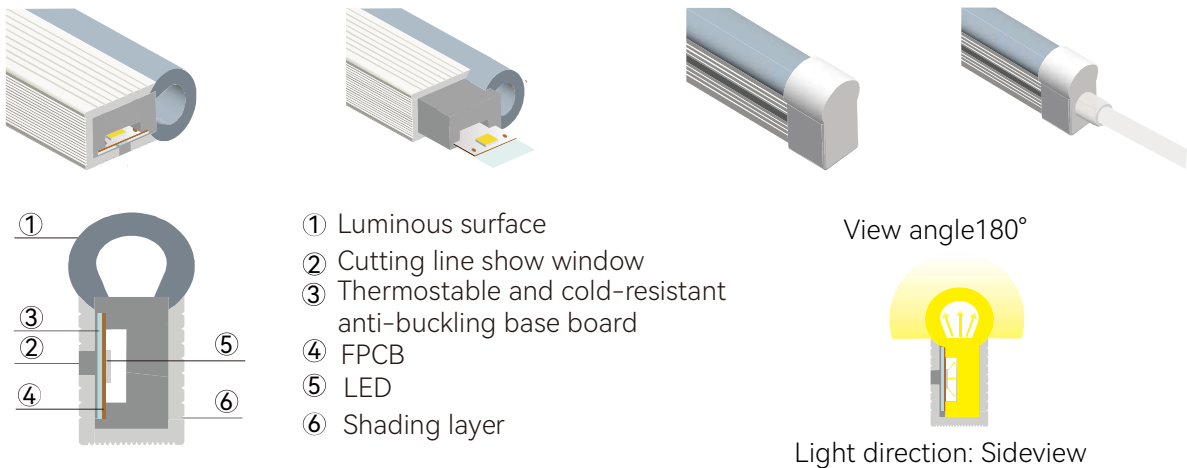

Dimension



Bendable Direction

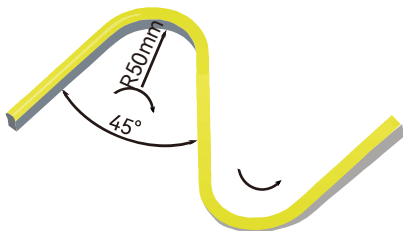



10×22mm Mushroom head Sideview LED Neon Flex

PCB Width(mm)	10mm
View Angle	DC12V/DC24V & Others customized
LED Type	2835 SMD/5050 SMD & Others customized
LED Qty.	120leds/m(Single color/HY and RGB) or 144leds/m(Single Color) or 168leds/m(HY)
CRI Available for white color	CRI80/CRI90/CRI95
Power recommended	16.8W/21W(Single color & HY)/26W(RGB)/26.8W(HY)
Color available	White/Natural white/Warm white/Red/Green/Blue/Amber/HY/RGB & others customized






Accessories



12 12×20mm Sideview Neon Flex

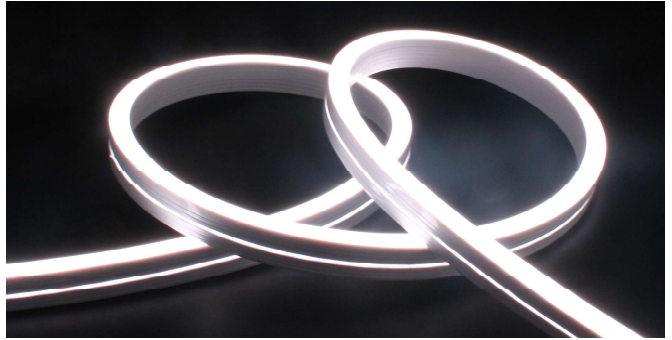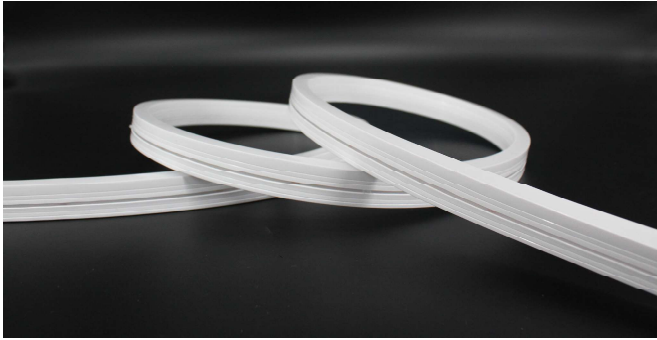


Structure




- ① Luminous surface
- ② Cutting line show window
- ③ Thermostable and cold-resistant anti-buckling base board
- ④ FPCB
- ⑤ Clip fixing position
- ⑥ LED
- ⑦ Shading layer

View angle 120°




Light direction: Sideview

Dimension



Bendable Direction




12×20mm Sideview LED Neon Flex

PCB Width(mm)	12mm
View Angle	DC12V/DC24V & Others customized
LED Type	5050 SMD & Others customized
LED Qty.	96leds/m or 120leds/m
CRI Available for white color	CRI80/CRI90/CRI95
Power recommended	26W(Single color & RGB)/27.6W(RGBW)/34.5W(RGBW/RGBHY)/38W(HY)
Color available	White/Natural white/Warm white/Red/Green/Blue/Amber/HY/RGB/RGBW/RGBHY

Accessories



End tail endcap



Left tail endcap



Right tail endcap




Bottom tail endcap




Endcap without tail



Stainless clip




Aluminum clip




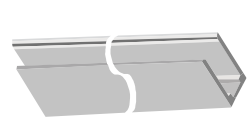


Aluminum Channel

13 12×25mm Sideview Neon Flex

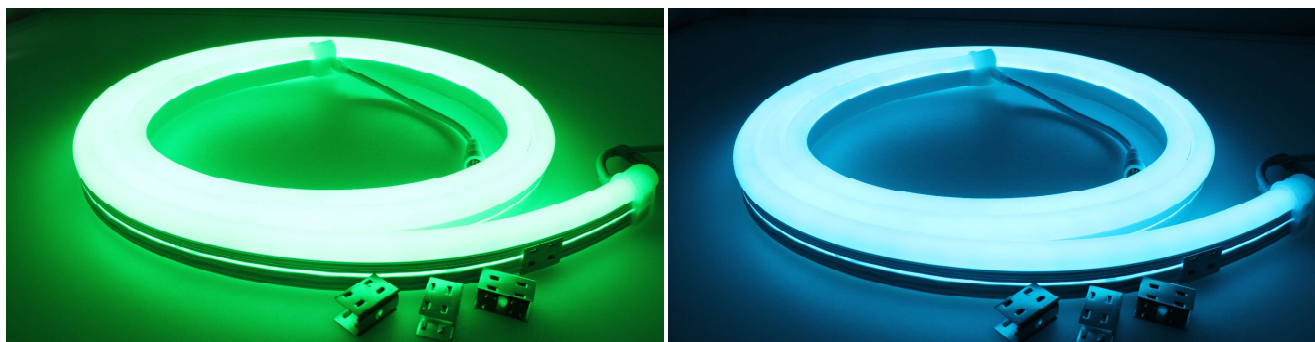


Structure




- ① Luminous surface
- ② Cutting line show window
- ③ Thermostable and cold-resistant anti-buckling base board
- ④ FPCB
- ⑤ LED
- ⑥ Shading layer

View angle 180°




Light direction: Sideview

Dimension



Bendable direction



12×25mm Mushroom head Sideview LED Neon Flex

PCB Width(mm)	12mm
View Angle	DC12V/DC24V & Others customized
LED Type	5050 SMD & Others customized
LED Qty.	96leds/m or 120leds/m
CRI Available for white color	CRI80/CRI90/CRI95
Power recommended	26W(Single color & RGB)/27.6W(RGBW)/34.5W(RGBW/RGBHY)/38W(HY)
Color available	White/Natural white/Warm white/Red/Green/Blue/Amber/HY/RGB/RGBW/RGBHY

Accessories



End tail endcap



Left tail endcap



Right tail endcap




Endcap without tail



Stainless clip




Aluminum clip








Aluminum Channel

14 15×15mm Topview Neon Flex

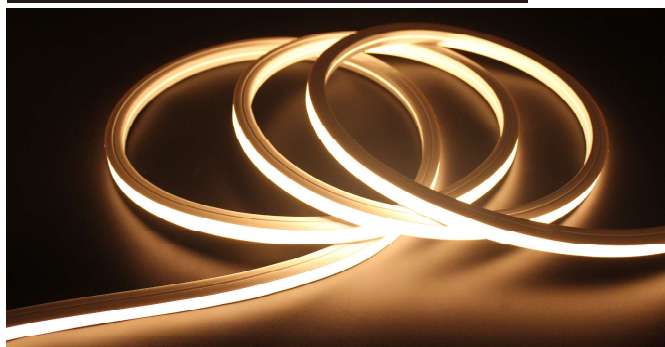


Structure




- ① Luminous surface
- ② Cutting line show window
- ③ Thermostable and cold-resistant anti-buckling base board
- ④ FPCB
- ⑤ Clip fixing position
- ⑥ LED
- ⑦ Shading layer

View angle 120°




Light direction: Topview

Dimension



Bendable direction




15×15mm Sideview LED Neon Flex

PCB Width(mm)	10mm
View Angle	DC12V/DC24V & Others customized
LED Type	2835 SMD & 5050 SMD & Others customized
LED Qty.	120leds/m(Single color and RGB) or 168leds/m(HY)
CRI Available for white color	CRI80/CRI90/CRI95
Power recommended	16.8W(Single color)/26.8W(HY)/24W(RGB)
Color available	White/Natural white/Warm white/Red/Green/Blue/Amber/HY/RGB & others customized


Accessories




End tail endcap



Right tail endcap




Left tail endcap




Bottom tail endcap




Endcap without tail



Stainless clip



Aluminum clip




Aluminum Channel


15 16×16mm Topview Neon Flex




Structure

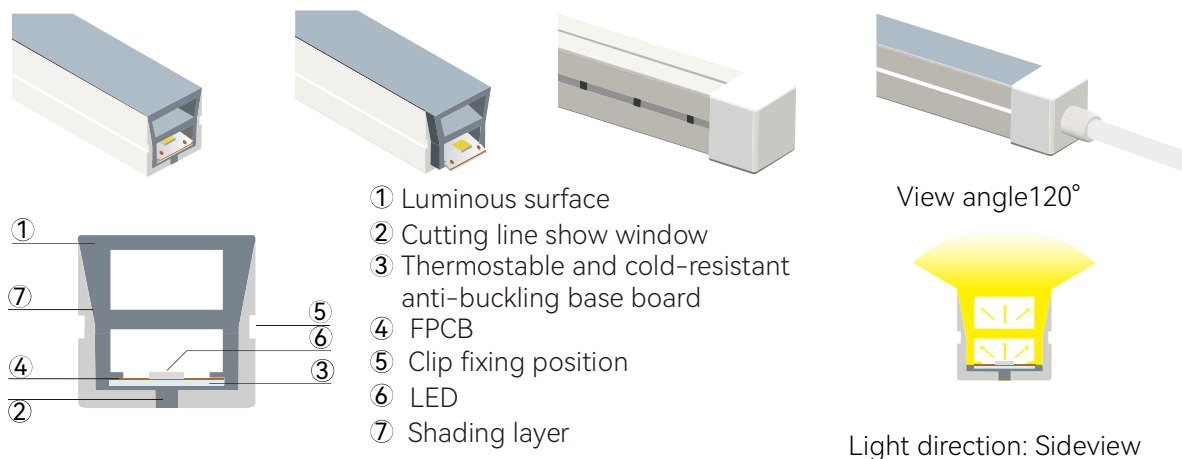

Dimension



Bendable Direction




16×16mm Topview LED Neon Flex

PCB Width(mm)	10mm
View Angle	DC12V/DC24V & Others customized
LED Type	2835 SMD & 5050 SMD & Others customized
LED Qty.	120leds/m(Single color and RGB) or 168leds/m(HY)
CRI Available for white color	CRI80/CRI90/CRI95
Power recommended	16.8W(Single color)/26.8W(HY)/24W(RGB)
Color available	White/Natural white/Warm white/Red/Green/Blue/Amber/HY/RGB & others customized






Accessories



16 15.8×16.6mm Topview Neon Flex

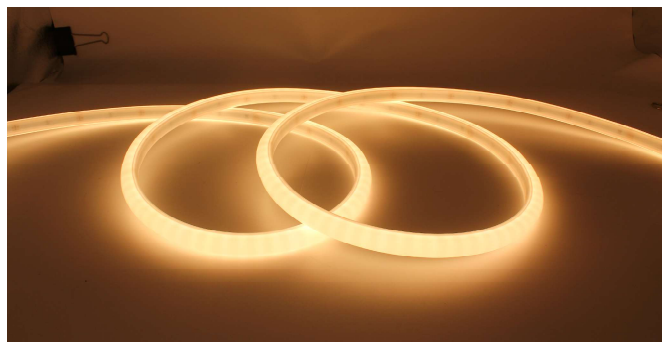


Structure




- ① Luminous surface
- ② Cutting line show window
- ③ Thermostable and cold-resistant anti-buckling base board
- ④ FPCB
- ⑤ LED
- ⑥ Shading layer

View angle 180°




Light direction: Sideview

Dimension




Bendable Direction




16.8×15.5mm Topview LED Neon Flex

PCB Width(mm)	10mm
View Angle	DC12V/DC24V & Others customized
LED Type	2835 SMD/5050 SMD & Others customized
LED Qty.	120leds/m(Single color and RGB) or 144leds/m(Single Color) or 168leds/m(HY)
CRI Available for white color	CRI80/CRI90/CRI95
Power recommended	14.4W/17.2W(Single color)/20W(HY)/24W(RGB)
Color available	White/Natural white/Warm white/Red/Green/Blue/Amber/HY/RGB & others customized

Accessories




Left tail endcap



Right tail endcap



Endcap without tail



Transparent PC clip

